

## P SERIES

# Accumulator

Accumulator is installed between the suction port of the refrigerating system compressors and evaporator to separate gas and fluid, store fluid, return oil and filter.



### FEATURES


- INLET AND OUTLET ARE MADE OF COPPER TUBES
- AIR GUIDING PART DIRECT THE REFRIGERANT TOWARD THE WALL WHICH FROM A SLIPSTREAM TO MAKE THE REFRIGERANT EXPAND QUICKLY AND SLOW THE FLOW TO LET THE LIQUID DROP DOWN. THIS EFFECTIVELY SEPARATES THE LIQUID AND GAS.
- THE U TUBE DESIGN GUARANTEE A MAX FLOW OF REFRIGERANT AND STOP LITTLE LUBRICATION OIL. THE INLET OF U TUBE IS BEHIND AIR GUIDING PART WHICH CAN PREVENT THE LIQUID FROM ENTERING COMPRESSOR. AT THE SAME TIME, IT CAN CHANGE THE DIRECTION OF REFRIGERANT TO COMPLETELY SEPARATE THE LIQUID AND GAS.
- THE BALANCING HOLE IN THE UPPER U TUBE CAN EFFECTIVELY ELIMINATE THE SIPHON CAUSED THE RESTART OF SYSTEM SO AS TO AVOID EXCESSIVE LIQUID ENTERING COMPRESSOR.
- THE OIL RETURN HOLE IS MATCHING THE SYSTEM CAPACITY TO OPTIMIZE THE FLOW OF LIQUID REFRIGERANT AND LUBRICATION OIL INTO COMPRESSOR
- CONNECTION TUBE, U TUBE AND VOLUME OF ACCUMULATOR IS DESIGNED BASED ON THE BASIC DEMAND OF HEAT PUMP SYSTEM ALLOWS A PROPER AND RELIABLE LIQUID REFRIGERANT AND LUBRICATION OIL BACK TO COMPRESSOR. THIS COMBINATION IS TO ACHIEVE A MINIMUM PRESSURE DROP AND LARGEST REFRIGERANT CAPACITY.
- POWER COATED SURFACE CAN SURVIVE 500 HOURS OF SALT SPRAY TEST.
- INCORPORATED FUSE OF 220°C

### GENERAL SPECIFICATIONS

- Applicable refrigerant: CFC, HCFC, HFC and HFO
- Applicable medium temperature: -30°C ~+120°C (22°F~+240°F)
- Applicable ambient temperature: -35°C ~+55°C (22°F~+131°F)
- Maximum working pressure: 2.5MPa
- Certification: UL, CSA and PED



**TECHNICAL PARAMETERS**

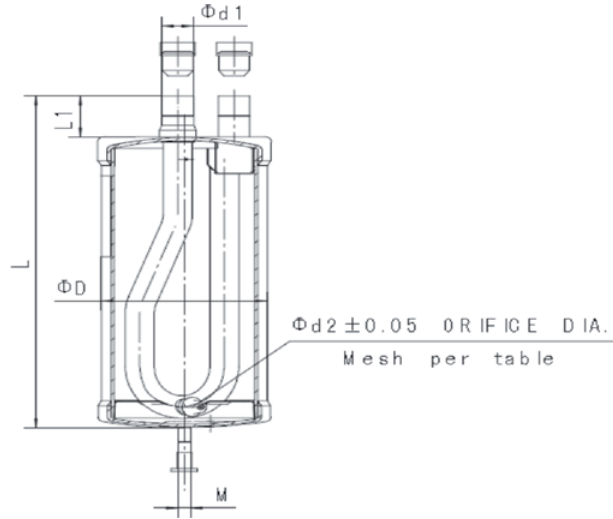

Model	PS Mpa	D inch	L inch	d1 inch	L1 inch	d2 inch	meshes/inN	ScrewM Size	VolumeL
ACM-P21076-901	2.5	3.00	7.31	5/8	1.35	0.04	60	3/8-16UNC-2A	0,63
ACM-P22076-901	2.5	3.00	10.58	5/8	1.35	0.04	60	3/8-16UNC-2A	0,98
ACM-P23076-901	2.5	3.00	15.05	5/8	1.35	0.04	60	3/8-16UNC-2A	1,46
ACM-P21101-901	2.5	4.00	9.88	5/8	1.35	0.04	60	3/8-16UNC-2A	1,59
ACM-P22101-901	2.5	4.00	9.88	5/8	1.35	0.06	30	3/8-16UNC-2A	1,59
ACM-P23101-901	2.5	4.00	9.88	3/4	1.35	0.04	60	3/8-16UNC-2A	1,59
ACM-P24101-901	2.5	4.00	9.88	3/4	1.35	0.06	30	3/8-16UNC-2A	1,59
ACM-P28101-901	2.5	4.00	11.11	3/4	1.35	0.06	30	3/8-16UNC-2A	1,83
ACM-P21127-901	2.5	5.00	9.86	7/8	1.59	0.06	30	3/8-16UNC-2A	2,49
ACM-P25127-901	2.5	5.00	11.57	7/8	1.59	0.06	30	3/8-16UNC-2A	3,01
ACM-P27127-901	2.5	5.00	11.33	3/4	1.35	0.06	30	3/8-16UNC-2A	3,01
ACM-P29127-901	2.5	5.00	12.88	7/8	1.59	0.06	30	3/8-16UNC-2A	3,41
ACM-P33127-901	2.5	5.00	15.34	7/8	1.59	0.06	30	3/8-16UNC-2A	4,14
ACM-P34127-901	2.5	5.00	15.34	7/8	1.59	0.04	60	3/8-16UNC-2A	4,14
ACM-P21153-901	2.5	6.00	14.42	11/8	1.90	0.08	30	1/2-13UNC-2A	5
ACM-P23153-901	2.5	6.00	16.07	11/8	1.90	0.08	30	1/2-13UNC-2A	5,7
ACM-P24153-901	2.5	6.00	16.23	13/8	2.06	0.08	30	1/2-13UNC-2A	5,7
ACM-P25153-901	2.5	6.00	18.72	11/8	1.90	0.08	30	1/2-13UNC-2A	6,8
ACM-P26153-901	2.5	6.00	18.88	13/8	2.06	0.08	30	1/2-13UNC-2A	6,8
ACM-P28153-901	2.5	6.00	21.03	13/8	2.06	0.08	30	1/2-13UNC-2A	7,8